



WTI, OTI & TEMP. TRANSDUCER

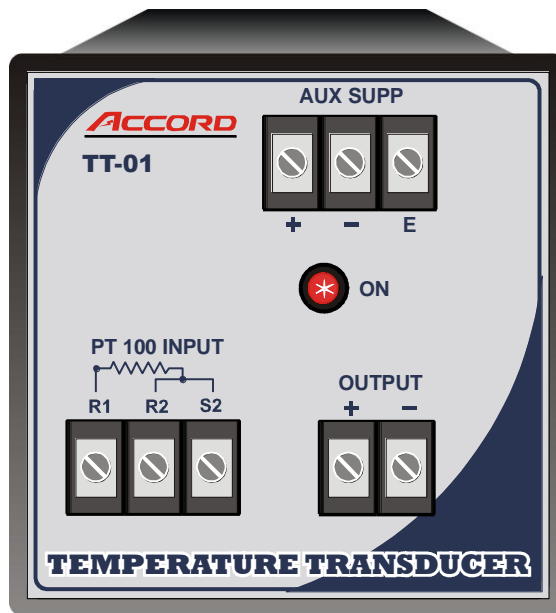

TEMP
TRANSDUCER

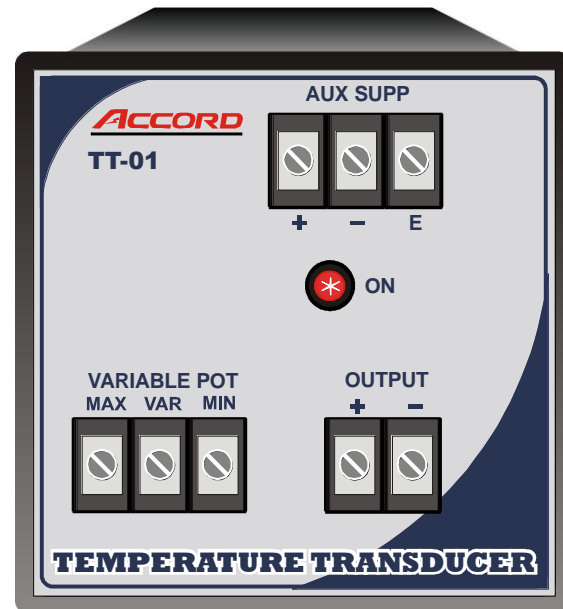

WTI & OTI
TRANSDUCER

FEATURES:

- Static design, no moving parts.
- Quick Response Time.
- Output independent of load impedance.
- Computerized Circuit design.
- Components have high thermal withstand capacity & can survive extreme tropical atmospheric conditions.
- Stable output even in case of wide power supply fluctuations (for self-powered & Aux. Powered transducers).
- Galvanic isolation between input / output /auxiliary power supply.
- Standard DIN Rail mounting, cabinets.

GENERAL SPECIFICATIONS:

- | | |
|----------------------------------|-----------------------------|
| 1. Auxiliary Supply. | :90-270V AC/DC |
| 2. Input. | : Resistance Input (PT-100) |
| 3. Output. | : Stable 4 – 20mA |
| 4. Burden on Auxiliary Supply. | : Less than 3VA. |
| 5. Ambient Operating Conditions. | : 00 – 550C, 5 – 95% RH. |
| 6. Mounting | : Din Rail |
| 7. Accuracy | : 1 % |